


Double sides power input, after 30 seconds there are no movement, then back to 0%/30% of brightness

**Product: T8 PIR Sensor tube, 0.6M, 10W**

| No. | Item                                  | Specification                                  |
|-----|---------------------------------------|--|
| 1   | Model No.                             | SLDP-T8D10NW-PR                                |
| 2   | Energy efficiency grade               | A+++   |
| 3   | Lamp Wattage                          | 10W  |
| 4   | Sensor time when people leave         | 0.5-3 minutes                                  |
| 5   | Maintain brightness when people leave | 0% - 30%                                       |
| 6   | Sensor distance                       | 3-6 m  |
| 7   | End-cap type                          | Rotated (180°)                                 |
| 8   | Input Voltage                         | AC90-264V                                      |
| 9   | Work Frequency                        | 50-60Hz  |
| 10  | PF                                    | >0.95  |
| 11  | Light Source                          | SMD2835/ 60PCS                                 |
| 12  | CCT                                   | 4000-4500K                                     |
| 13  | Nominal light flux                    | 1200LM   |
| 14  | Luminous Efficacy                     | 120LM/W  |
| 15  | Beam Angle                            | 140°   |
| 16  | CRI                                   | CRI ≥ 80                                       |
| 17  | Illumination(2 meters under tube)     | 89 LX  |
| 18  | PC cover                              | Milky Cover ( Clear Cover can be also offered) |
| 19  | Effective Lifetime                    | 50,000hrs                                      |
| 20  | Working Temperature                   | -25°C ~ +45°C                                  |
| 21  | Ingress Protection                    | IP50   |
| 22  | Weight                                | 175G   |
| 23  | Dimension                             | 602x28.3x32.2mm                                |
| 24  | Packing/Carton                        | 25PCS/9.5kgs/67x23x25cm                        |
| 25  | Certificate                           | CE,ROHS  |

**Dimention (mm)**

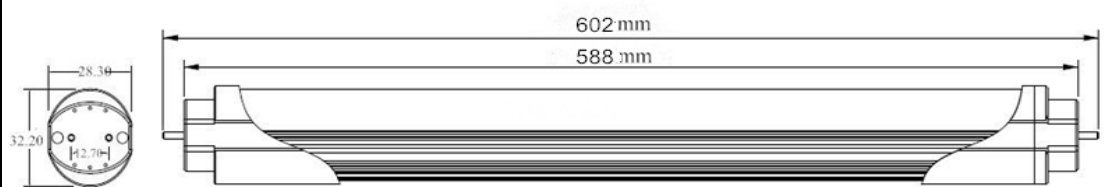

**Picture**



**Application:**

Widely used in Car park, basement, Hotel corridor, Supermarket corridor, School corridor, Hospital corridor, warehouse, stairs, hallway, toilet, kitchen, doorway

